



# Sheet Pile Infill

## Profile TBC

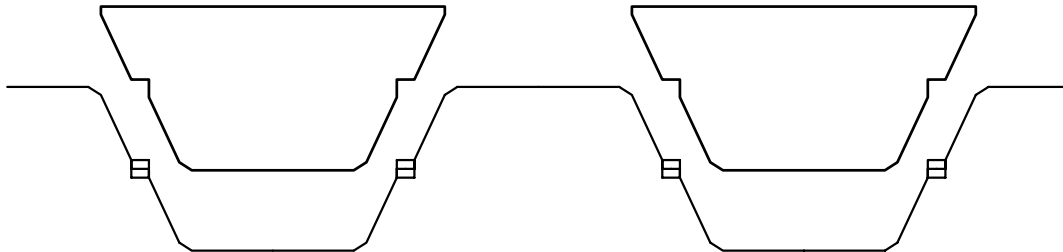

Sheet Pile Type and Sizes are TBC  
so Pile Infills can be fabricated accordingly.

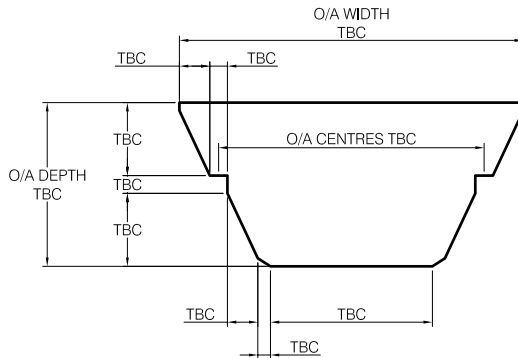

Supplied in 1220mm Lengths  
Filcor Grade to be determined

EPS Grades And Performance	
* Grades	Compressive Strength @ 1% strain
Filcor 10	10 kN/m <sup>2</sup>
Filcor 20	20 kN/m <sup>2</sup>
Filcor 45	45 kN/m <sup>2</sup>
Filcor 70	70 kN/m <sup>2</sup>
Filcor 100	100 kN/m <sup>2</sup>
* All Filcor grades of expanded polystyrene are manufactured in accordance with BS EN 13163:2001	
The above materials are available in a Flame Retardant Grade if required.	

Information	Issued For : Comment    Approval Manufacture
Spring Copse Business Park Slinfold West Sussex RH13 0SZ	
INNOVATIVE PRODUCTS FOR CONSTRUCTION	
Tel : 01403 799600    Fax : 01403 791718 Email : sales@cordek.com	
Client : CORDEK LIMITED	
Contract :	
Drg. Title : SHEET PILE INFILL STANDARD DETAIL	
Drawn : TREVOR LARKIN	
Date : JAN 2003	Scales : NTS
Drg. No. COR/STD/024	Rev. ---

Materials :	Notes :-	
EPS Grade - FILCOR TBC	1. This drawing is not to be scaled.	
Correx Grade - N/A	2. This drawing is the copyright of Cordek Ltd. and therefore should not be copied without our prior consent.	
Propylex Thickness - N/A		